



Osmonics®

Autotrol® Product Specifications

255/440i

Flow Rates (Valve Only)

- Service @ 15 psi (1.03 bar) drop15.5 gpm (58 Lpm)
- Backwash @ 30 psi (2.07 bar) drop.....6.5 gpm (24.6 Lpm)
- Service.....Cv = 3.99 (Kv = 3.35)
- BackwashCv = 1.20 (Kv = 1.02)

Tested with a 3/4-inch Brass Manifold

Control Operation

- Timer ConfigurationTime Clock, 7 or 6 Day
- Cycles: Length: (Standard)
- Backwash13 Minutes
- Brine/Slow Rinse.....52 Minutes
- Fast Rinse.....6 Minutes
- Brine Refill.....9 Minutes

Valve Connections/Dimensions

- Tank Thread2 1/2 inches - 8, Male
- Inlet/Outlet Manifold (Brass or Noryl*).....1-inch NPT or 1-inch BSPT, Female
.....3/4-inch NPT or 3/4-inch BSPT, Female
- Brine Line1/4-inch NPT, Male
- Distributor Tube Diameter1.050 inches (27 mm) or 13/16 inch (20.6 mm)
- Distributor Tube Length1 1/8 ± 1/8 inches (29 mm ± 3 mm) Above Tank

Design Specifications/Ratings

- Valve BodyGlass-Filled Noryl
- Rubber ComponentsCompounded for Cold Water
- Weight (Valve with Control).....4 lbs (1.8 kg)
- Transformer Output.....12VAC 400 mA
- Transformer Input.....115V 50/60 Hz, 230V 50/60 Hz
.....100V 50/60 Hz
- Recommended Operating Pressure.....20-120 psi (1.38-8.27 bar)
.....Canada20-100 psi (1.38-6.89 bar)
- Water Temperature.....35°-100°F (2°-38°C)

Options

- Bypass ValveNoryl, 1/2-inch NPT Male, Drain
- Bypass Inlet/Outlet Fitting Kits:
Copper, Sweat Tube Adapter.....1 inch or 3/4 inch or 28 mm or 22 mm
CPVC, Solvent Weld Tube Adapter.....1 inch or 3/4 inch or 25 mm
Plastic NPT or BSPT Pipe Adapter1-inch Male or 3/4-inch Male
Brass NPT or BSPT Pipe Adapter1-inch Male or 3/4-inch Male
- Brine Refill Controls1-10 lbs (0.45-4.5 kg)
.....3-19 lbs (1.3-8.6 kg)



Backwash Flow Control Table

Backwash Number**	7	8	9	10	12	13	14
Tank Diameter (inches/mm)	7/186	8/210	9/235	10/260	12/305	13/334	14/369
Flow Rate (gpm)	1.3	1.7	2.2	2.7	3.4	4.5	5.3
Flow Rate (Lpm)	4.9	6.4	8.3	10.2	12.9	17.0	20.0

*Noryl is a trademark of General Electric Company.

**Backwash flow controls sized for 5.0 gpm/ft².

Pressure Loss Characteristics

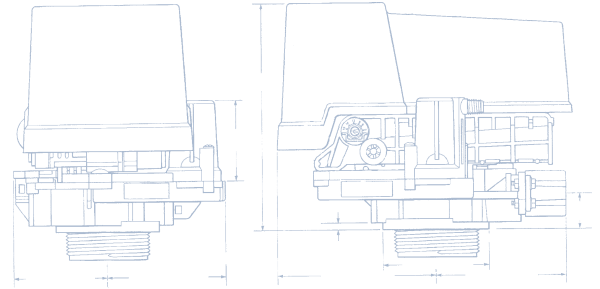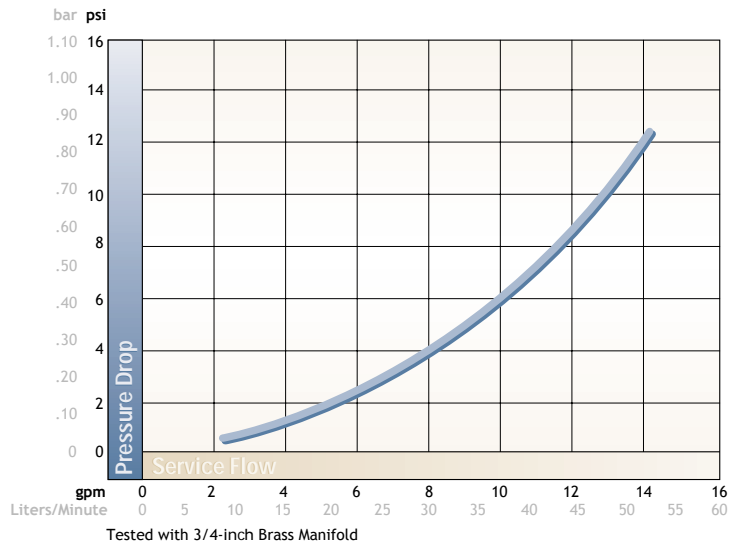

Injector Flow Rate Chart (gpm)

"A" Injector with #7 Backwash Control				"B" Injector with #8 Backwash Control			"C" Injector with #10 Backwash Control		
psi	Draw	Motive	Rinse	Draw	Motive	Rinse	Draw	Motive	Rinse
20	0.15	0.22	0.24	0.17	0.41	0.46	0.20	0.64	0.69
30	0.20	0.27	0.27	0.23	0.48	0.53	0.28	0.69	0.76
50	0.26	0.33	0.33	0.29	0.63	0.66	0.36	0.87	0.91
70	0.32	0.38	0.37	0.37	0.75	0.75	0.41	1.00	1.00
90	0.35	0.42	0.42	0.41	0.83	0.83	0.41	1.13	1.17
120	0.39	0.48	0.48	0.43	0.94	0.93	0.42	1.30	1.32

Injector Flow Rate Chart (Lpm)

"A" Injector with #7 Backwash Control				"B" Injector with #8 Backwash Control			"C" Injector with #10 Backwash Control		
bar	Draw	Motive	Rinse	Draw	Motive	Rinse	Draw	Motive	Rinse
1.38	0.56	0.83	0.91	0.64	1.55	1.74	0.75	2.42	2.87
2.08	0.75	1.02	1.02	0.87	1.82	2.00	1.06	2.61	2.87
3.46	0.98	1.25	1.25	1.09	2.38	2.50	1.36	3.29	3.44
4.85	1.21	1.44	1.40	1.40	2.84	2.84	1.55	3.78	3.78
6.24	1.32	1.59	1.59	1.55	3.14	3.14	1.55	4.28	4.16
8.32	1.47	1.81	1.81	1.62	3.56	3.52	1.59	4.92	4.99

Note: Injector tested on an empty tank (no resin). Actual injector performance is dependent on type of resin, tank geometry and drain line configuration. Motive flow rate indicates feedwater (excluding brine) through the injector nozzle during the brine draw cycle. Rinse flow rate indicates flow through the injector after closure of the air check.

Call for additional information, (888) 588-8088, or visit www.aclear.com



OSMONICS

A Clear Alternative
 Water Conditioning & Bottled Water
 230 Collins Avenue
 Pennsauken, NJ 08110
 (888) 577-8088 Phone